


Üç-Yollu, İki-Konumlu, Bobin-Tip Kartriç Solenoid Valf

LSV-10-3-L

Three-Way, Two-Position, Poppet-Type Cartridge Solenoid Valve

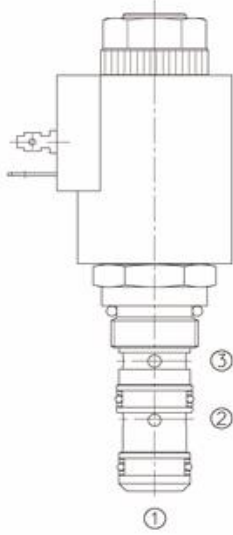

OPERATION

When de-energized, the valve allows flow in ② and ①, while blocking flow at ③.

When energized, the valve allows flow in ② and ③ while blocking flow at ①.

Operation of Manual Override Option:

To override, push plunger in. In this position, valve will remain detented in the shifted condition.

To return to normal operation, release the plunger.


FEATURES

- Continuous-duty solenoid.
- Hardened precision poppet and sleeve for long life.
- Efficient wet-armature construction.
- Optional coil voltages and terminations.
- Zero leak valve .
- Manual override option.
- Industry common cavity.
- Compact size.

ÖZELLİKLER



- Süreklî-çalışabilen bobin
- Uzun ömür için sertleştirilmiş hassas bobin ve manşon
- Etkili ıslak-armatür konstrüksiyon
- Seçmeli bobin voltajı ve sınırlama
- Sızdırmaz valf
- Üstün manuel kumada ayarları
- Endüstriyel standartlarda kavite
- Kompakt boyut

SYMBOL



PERFORMANCE CHARACTERISTIC

BASINÇ DÜŞÜMÜ (bar)

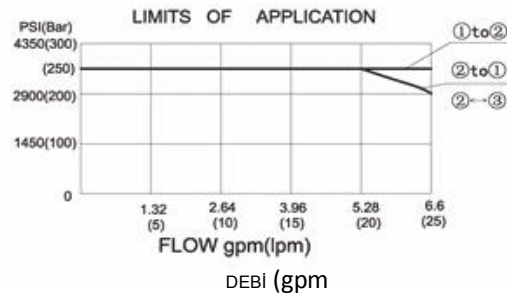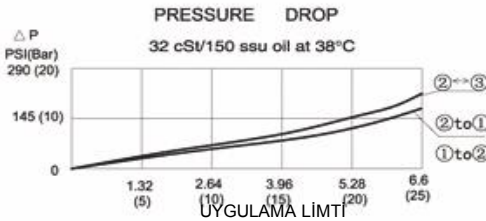

SPECIFICATIONS

Operating Pressure :250 Bar

Flow : See PERFORMANCE CHARACTERISTIC graph.

Internal Leakage : Zero drops/min.

Temperature : -30° F to +250° F (-35°C to +120° C)

Coil Rating : Continuous from 85% to 110% of rated voltage.

Recommended Filtration : ISO 16/12

Fluids : Mineral-based fluids.

For other fluid compatibility consult factory.

Cavity : 10-3, see page 265

Body Material : Anodized 6061T6 aluminum alloy rated at 207 Bar.

Hidrosam Hidropar Hidrolik Pnömatik Elektrik San.Tic. Ltd


Alaaddinbey mah. 623 sok. Sam 1 plaza B blok No:2/d Nilüfer/BURSA TURKEY

Tel:+90224 441 8877 Fax:+90224 441 0333

info@hidrosam.com www.hidrosam.com


YERLEŞTİRME ÖLÇÜLERİ

INSTALLATION DIMENSIONS

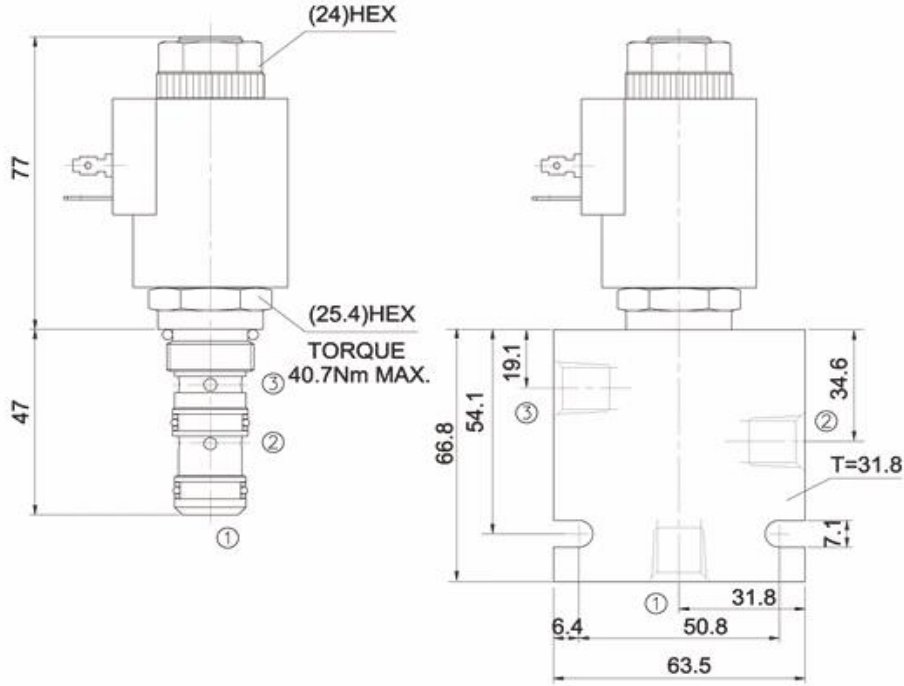

Unit=Millimeters

TO ORDER

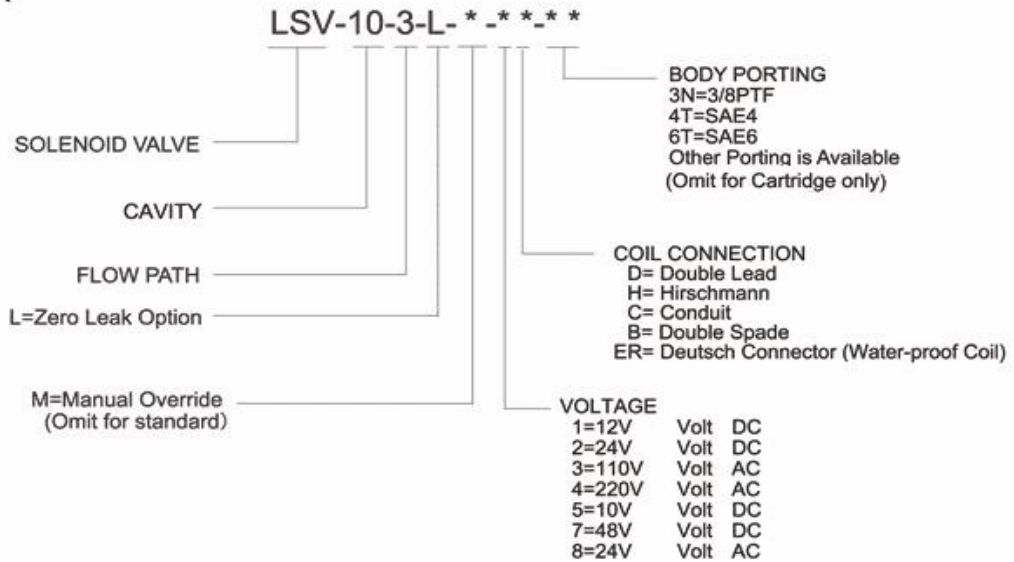

Hidrosam Hidropar Hidrolik Pnömatik Elektrik San.Tic. Ltd
Alaaddinbey mah. 623 sok. Sam 1 plaza B blok No:2/d Nilüfer/BURSA TURKEY

Tel:+90224 441 8877 Fax:+90224 441 0333

info@hidrosam.com www.hidrosam.com