

PP-1,3-Q-L-1-S-938-FB


MAXTOR DİŞLİ POMPA POWERPACK SERİSİ

End cover: g3/8 thread depth 12.
To mount the pump, n.2 M8 screws,
with a torque wrench setting fixed
at 27 ± 3 Nm.



INLET

OUTLET

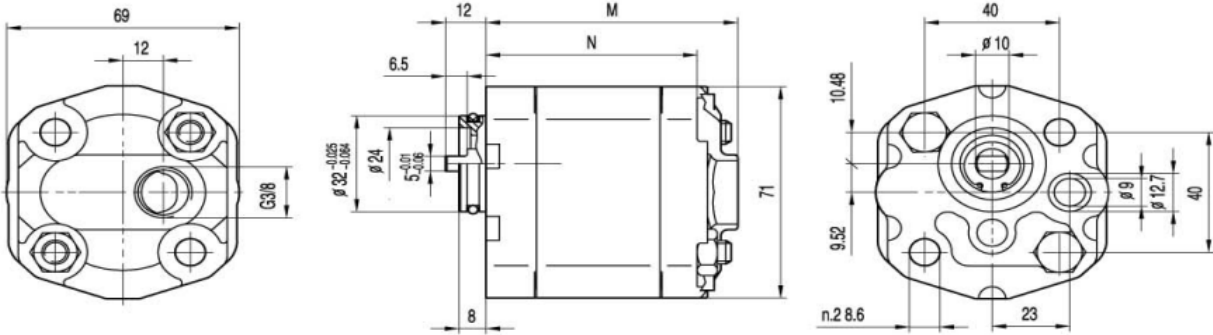

Powerpack tipi	Deplasmanı (cc/dak)	Çalışma basıncı		Maks. Hız (r/min)	Min. Hız (r/min)	Ölçüler	
		Sürekli bar	Pik bar			M	L
PP-0.8-Q-L-1-S-938-FB	0,88	230	270	6000	1000	73,5	61,5
PP-1.1-Q-L-1-S-938-FB	1,1	230	270	6000	1000	74	62,0
PP-1.3-Q-L-1-S-938-FB	1,3	230	270	6000	1000	75	63,0
PP-1.6-Q-L-1-S-938-FB	1,6	230	270	6000	1000	76	64,0
PP-1.8-Q-L-1-S-938-FB	1,8	230	270	6000	1000	77	65,0
PP-2.1-Q-L-1-S-938-FB	2,1	230	270	6000	1000	78	66,0
PP-2.7-Q-L-1-S-938-FB	2,7	230	270	6000	800	80	68,0
PP-3.2-Q-L-1-S-938-FB	3,2	210	250	5000	800	82	70,0
PP-3.7-Q-L-1-S-938-FB	3,7	210	250	4500	800	84	72
PP-4.2-Q-L-1-S-938-FB	4,2	210	250	4000	800	86	74
PP-4.8-Q-L-1-S-938-FB	4,8	190	230	3500	600	88	76
PP-5.8-Q-L-1-S-938-FB	5,8	190	230	3000	600	92	80
PP-7.0-Q-L-1-S-938-FB	7,0	160	200	2500	600	96	84
PP-8.0-Q-L-1-S-938-FB	8,0	160	200	2100	600	100	88



BU ÜRÜNLERLE İLGİLİ LÜTFEN MÜHENDİSLİK DEPARMANIYLA İLETİŞİME GEÇİNİZ.